

**BIRCH, STEWART, KOLASCH & BIRCH, LLP**

**INTELLECTUAL PROPERTY LAW**  
**8110 GATEHOUSE ROAD**  
**SUITE 500 EAST**  
**FALLS CHURCH, VA 22042-1210**  
**USA**

(703) 205-8000

FAX: (703) 205-8050  
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com  
web: http://www.bskb.com

**CALIFORNIA OFFICE**  
**COSTA MESA, CALIFORNIA**

THOMAS S. AUCHTERLON  
JAMES T. ELLER, JR.  
SCOTT L. LOWE  
MARK J. NUELLE, PH.D.  
D. RICHARD ANDERSON  
PAUL C. LEWIS  
MARK W. MILSTEAD\*  
RICHARD J. GALLAGHER  
JAYNE M. SAYDAH\*  
MARYANNE ARMSTRONG, PH.D.  
HYUNG N. SOHN  
ALAN PEDERSEN-GILES  
KECIA J. REYNOLDS

REG. PATENT AGENTS:  
FREDERICK R. HANDREN  
MAKI HATSUMI  
MIKE S. RYU  
CRAIG A. McROBBIE  
GARTH M. DAHLEN, PH.D.  
ROBERT E. GOOZNER, PH.D.  
MATTHEW J. LATTIG  
TIMOTHY R. WYCKOFF  
KRISTI L. RUPERT, PH.D.  
LARRY J. HUME  
ALBERT K. LEE  
HARRY A. SAYADIAN, PH.D.  
EVE L. FRANK, PH.D.  
MATTHEW T. SHANLEY

TERRELL C. BIRCH  
RAYMOND C. STEWART  
JOSEPH A. KOLASCH  
JAMES M. SLATTERY  
BERNARD L. SWEENEY\*  
MICHAEL K. MUTTER  
CHARLES GORENSTEIN  
GERALD M. MURPHY, JR.  
LEONARD R. SVENSSON  
GERRY L. CLARK  
ANDREW D. MEIKLE  
MARC S. WEINER  
JOE MCKINNEY MUNCY  
ROBERT J. KENNEY  
RONALD J. DALEY  
JOHN W. BAILEY  
JOHN A. CASTELLANO  
GARY D. YACURA

OF COUNSEL:  
HERBERT M. BIRCH (1905-1996)  
ELLIOT A. GOLDBERG\*  
WILLIAM L. GATES\*  
EDWARD H. VALANCE  
RUPERT J. BRADY (RET.)\*  
F. PRINCE BUTLER  
FRED S. WHISENHUNT

\*ADMITTED TO A BAR OTHER THAN VA

Date: November 9, 2000

Docket No.: 2185-480P

**BOX PATENT APPLICATION**

Assistant Commissioner for Patents  
Washington, DC 20231

Sir:

As authorized by the inventor(s), transmitted herewith for filing is a patent application applied for on behalf of the inventor(s) according to the provisions of 37 C.F.R. § 1.41(c).

Inventor(s): Satoru NIPPA

For: RESIN COMPOSITE AND METHOD FOR PRODUCING THE SAME

Enclosed are:

- ☒ A specification consisting of twenty-five (25) pages
- ☒ One (1) sheet(s) of formal drawings
- ☐ Applicant does not claim priority
- ☒ Applicant claims the right of priority based on Japan 11-320987 filed on November 11, 1999
  - ☒ Certified copy is attached hereto
  - ☐ Certified copy will follow
- ☒ Executed Declaration in accordance with 37 C.F.R. § 1.64 will follow
- ☐ Applicant claims small entity status under 37 C.F.R. § 1.27

- ☐ Preliminary Amendment
- ☐ Application Data Sheet in accordance with 37 C.F.R. § 1.76
- ☒ Information Disclosure Statement, PTO-1449 and reference(s)
- ☐ Other: \_\_\_\_\_
- ☐ Applicant requests early publication

The filing fee has been calculated as shown below:

			LARGE ENTITY	SMALL ENTITY
BASIC FEE			\$710.00	\$355.00
	NUMBER FILED	NUMBER EXTRA	RATE FEE	RATE FEE
<b>TOTAL CLAIMS</b>	4-20=	0	x 18 = \$0.00	x 9= \$0.00
<b>INDEPENDENT CLAIMS</b>	2-3=	0	x 80 = \$0.00	x40= \$0.00
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED			+ \$270.00	+ \$135.00
<b>TOTAL</b>			\$710.00	\$0.00

- ☒ The application transmitted herewith is filed in accordance with 37 C.F.R. § 1.41(c). The undersigned has been authorized by the inventor(s) to file the present application. The original duly executed declaration together with the surcharge will be forwarded in due course.
- ☒ A check in the amount of \$710.00 to cover the filing fee is enclosed.
- ☐ Please charge Deposit Account No. 02-2448 in the amount of \$0.00. A triplicate copy of this transmittal form is enclosed.
- ☒ Please send correspondence to:


BIRCH, STEWART, KOLASCH & BIRCH, LLP **or** Customer No. 2292  
P.O. Box 747  
Falls Church, VA 22040-0747  
Telephone: (703) 205-8000

Docket No. 2185-480P

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By   
John W. Bailey, #32,881

JWB:law  
2185-480P

P.O. Box 747  
Falls Church, VA 22040-0747  
(703) 205-8000

Attachments

(REV. 11/02/2000)

# RESIN COMPOSITE AND METHOD FOR PRODUCING THE SAME

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

5       The present invention relates to a resin composite and a method for producing the resin composite. In particular, the invention relates to a resin composite which may be used as a raw material for tires of automobiles, cushioning materials and the like and to a method for producing the resin  
10 composite.

### 2. Description of Related Art

Heretofore, a method in which a metal hydroxide is filled in a resin is known as a way for imparting reinforcement to  
15 resins. For example, Japanese Patent Laid-Open Publication No. 10-59713-A discloses a resin composite obtained by kneading styrene-butadiene rubber and aluminum hydroxide powder.

Even the resin composite disclosed in the Japanese Patent  
20 Laid-Open Publication No. 10-59713-A, however, does not necessarily have sufficient tensile strength and, therefore, a resin composite improved in tensile strength has been desired.

25

## SUMMARY OF THE INVENTION

The objects of the present invention are to provide a resin composite having excellent tensile strength and to provide a method of producing such a resin composite.

After investigations into the improvement of tensile  
5 strength of resin composite, the present inventors have found that a resin compound having specific physical properties is excellent in tensile strength and completed the present invention.

That is, the present invention provides a resin composite  
10 comprising a resin and aluminum hydroxide having an average primary-particle diameter of about 100 nm or smaller, wherein said composite has an index  $Y/X$  of 0.1 or less provided that the value  $X$  is an average value of intensities of aluminum characteristic X-ray measured by scanning a beam on a straight  
15 line on the composite with an electron-probe X-ray microanalyzer and the value  $Y$  is a standard deviation of the intensities.

The present invention also provides a method for producing a resin composite comprising the steps of mixing  
20 an aqueous resin emulsion containing a resin with aluminum hydroxide having an average primary-particle diameter of 100 nm or smaller, letting the resin and the aluminum hydroxide therein aggregate to obtain a slurry containing a resin composite and separating the composite from the slurry.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows electron-probe X-ray microanalyzer charts of sections of resin composites obtained in Examples 1 and 2 and Comparative Example 1 in the present application.

5

## DETAILED DESCRIPTION OF THE INVENTION

The resin composite of the present invention contains a resin and aluminum hydroxide. Examples of the resin include synthetic resins such as vinyl acetate resin, acrylic resin, silicon resin, polybutene resin, copolymer resins and vinyl acetate with ethylene, styrene, acrylic acid or vinyl chloride, polystyrene, styrene-butadiene rubber, butadiene rubber, chloroprene rubber and isoprene rubber. These may be used alone or by mixing two or more of them.

10

15

The aluminum hydroxide to be used in the present invention has a chemical formula of  $\text{Al}_2\text{O}_3 \cdot n\text{H}_2\text{O}$  ( $n$  is from 1 to 3) and has an average primary-particle diameter of about 100 nm or smaller, preferably of from about 1 nm to about 50 nm and more preferably of from about 10 nm to about 50 nm.

20

The average primary-particle diameter of aluminum hydroxide can be represented by Feret's diameter, which can be determined as a distance between two parallel lines crossing in the same direction in a transmission electron microscope visual field and holding a particle seen in the visual field

25

therebetween (see, for example, Powder Technology Handbook, p. 4, 1965, published by Asakura Shoten). Crystalline structure of the aluminum hydroxide is preferably gibbsite, boehmite, bayerite, an amorphous form and the like. Boehmite  
5 is particularly recommended. The aluminum hydroxide having the above-described particle diameter can be produced by, for example, a method in which an aluminum alkoxide is hydrolyzed, a method in which an alkaline aluminate solution is mixed with an acidic solution such as aluminum sulfate  
10 solution or the like. In these methods, the obtained aluminum hydroxide may be washed with water or the like or may be passed through a continuous wet grinder or the like to form a suspension, which is then heated at a temperature of from 50°C to 200°C for a period of time of from 5 hours to 100 hours.  
15 A resin composite in the present invention contains the aluminum hydroxide preferably in an amount of not smaller than 1 part by weight, and more preferably in an amount of not smaller than 10 parts by weight, based on 100 parts by weight of the resin therein. Also, the resin composite  
20 contains the aluminum hydroxide preferably in an amount of not more than 200 parts by weight, and more preferably in an amount of not more than 100 parts by weight.

In the resin composite described above, the aluminum hydroxide is dispersed. A degree of the dispersion of the  
25 aluminum hydroxide in the resin composite may be evaluated

by an index  $Y/X$  wherein the value  $X$  is an average value of intensities of aluminum characteristic X-ray measured by scanning a beam on a straight line on the composite by means of an electron-probe X-ray microanalyzer (hereinafter, referred to as EPMA) and the value  $Y$  is a standard deviation of the intensities. The measurements of EPMA may be conducted by applying a beam on a section of the resin composite sample with EPMA and scanning the beam on a straight line thereon so as to measure the characteristic X-ray intensities of aluminum at points on the line. Using the X-ray intensities obtained at all scanning points, the average intensity  $X$  of the characteristic X-ray and the standard deviation  $Y$  thereof can be calculated. When the amount of aluminum hydroxide in the resin composite is the same, the standard deviation  $Y$  itself can be used for representing the degree of the dispersion of the aluminum hydroxide in the resin composite. However, an absolute standard deviation varies even in the same dispersion degree depending on the amount of aluminum hydroxide, which is reflected in the average characteristic X-ray intensity  $X$ . Thus, in the present invention, both the average characteristic X-ray intensity  $X$  and the standard deviation  $Y$  obtained by the above-described method are utilized to show the degree of the dispersion of the aluminum hydroxide in the resin composite by the index  $Y/X$ , which is not influenced by the amount of the aluminum hydroxide



contained in the resin composite. The higher the dispersion degree of aluminum hydroxide in a resin composite, the smaller the index Y/X. The resin composite in the present invention has an index Y/X of 0.1 or less. The index Y/X is preferably 5 0.07 or less, and more preferably 0.04 or less. The longer the distance of scanning the beam on the resin composite sample in EPMA measurement is, the more accurate the dispersion degree of aluminum hydroxide in a resin composite may be shown. In the present invention, the distance is preferably about 100 10  $\mu\text{m}$  or longer, more preferably about 200  $\mu\text{m}$  or longer.

The resin composite of the present invention can be produced, for example, by mixing an aqueous resin emulsion containing a resin with aluminum hydroxide having an average primary-particle diameter of 100 nm or smaller, stirring the 15 resulting mixture, letting the resin and the aluminum hydroxide in the resulting mixture aggregate to obtain a slurry containing a resin composite and separating the composite from the slurry. In a method in which a resin and aluminum hydroxide is kneaded, the aluminum hydroxide does not disperse 20 sufficiently in the resulting resin composite and it is difficult to obtain a resin composite having the above-described index Y/X.

Examples of the aqueous resin emulsion used for producing the resin composite in the present invention include an 25 emulsion obtained by dispersing, in water, particles of

synthetic resin which may have a surface potential possessing the same sign as that of aluminum hydroxide in water to make an emulsion. Examples of the synthetic resin include vinyl acetate resin, acrylic resin, silicon resin, polybutene resin, a copolymer resin of vinyl acetate and a monomer selected from ethylene, styrene, acrylic acid and vinyl chloride, a copolymer resin of acrylonitrile and styrene, polystyrene, styrene-butadiene rubber, butadiene rubber, chloroprene rubber and isoprene rubber. An average particle diameter of these resins may be 0.5  $\mu\text{m}$  or smaller. Among the aqueous resin emulsions containing such synthetic resins, it is preferred to use styrene-butadiene rubber latex, butadiene rubber latex, chloroprene rubber latex and isoprene rubber latex. The aqueous resin emulsion may contain a disperse medium other than water. Examples of such a disperse medium include alcohols having solubility with water. A solid content of the aqueous resin emulsion may fall within a range of from about 20% by weight to about 80% by weight.

The aluminum hydroxide to be mixed with the aqueous resin emulsion has an average primary-particle diameter of about 100 nm or smaller, preferably of from about 1 nm to about 50 nm and more preferably of from about 10 nm to about 50 nm. It is preferred that the aluminum hydroxide has an average secondary-particle diameter of about 3  $\mu\text{m}$  or smaller, more preferably of about 1  $\mu\text{m}$  or smaller. Crystalline structure

of the aluminum hydroxide is preferably gibbsite, boehmite, bayerite, an amorphous form or the like. Boehmite is particularly recommended. The aluminum hydroxide may be mixed with the aqueous resin emulsion, in the form of a suspension, a colloidal solution or a water-containing solid. The water-containing solid to be used may contain water in amount of from about 50% by weight to about 70% by weight. The amount of aluminum hydroxide to be mixed with the aqueous resin emulsion may be determined so that the aluminum hydroxide is contained in a desired amount in the resulting resin composite.

The mixing of the aqueous resin emulsion with the aluminum hydroxide having an average primary-particle diameter of 100 nm or smaller is preferably performed under such conditions that a surface potential of the resin in the resulting mixture has the same sign as that of a surface potential of the aluminum hydroxide in the resulting mixture. For example, the mixing can be performed by a method in which pH of an aluminum hydroxide slurry is adjusted to be from about 4 to about 9 and then an emulsion of a resin having a positive surface potential at the adjusted pH is added to the aluminum hydroxide slurry, a method in which pH of an aluminum hydroxide slurry is adjusted to be from about 10 to about 12 and then an emulsion of a resin having a negative surface potential at the adjusted pH is added to the aluminum

hydroxide slurry, a method in which to water having pH of  
from about 4 to about 9 are added aluminum hydroxide and an  
emulsion of a resin having a positive surface potential at  
the pH of the water and a method in which to water having  
5 pH of from about 10 to about 12 are added aluminum hydroxide  
and an emulsion of a resin having a negative surface potential  
at the pH of the water. In these methods, the surface potential  
of the aluminum hydroxide is adjusted with pH. The surface  
potential of the aluminum hydroxide may also be adjusted by  
10 treating the surface of the aluminum hydroxide with anionic  
chemicals or cationic chemicals. When the surface potential  
of the aluminum hydroxide has a different sign from that of  
the surface potential of the resin in the mixture,  
heterogeneous aggregation may occur in mixing the aqueous  
15 resin emulsion and the aluminum hydroxide. A surface  
potential of the resin can be represented by a zeta potential  
of the particles thereof in the aqueous resin emulsion. A  
surface potential of aluminum hydroxide can be represented  
by a zeta potential of the aluminum hydroxide at the same  
20 pH as that of water in the suspension, colloidal solution  
or water-containing solid containing the aluminum hydroxide.  
The mixing is preferably performed under such conditions that  
pH of the aqueous resin emulsion is substantially the same  
as that of the water in the suspension, colloidal solution  
25 or water-containing solid containing the aluminum hydroxide.

The difference between the former pH and the latter pH may be about 1 or less, preferably about 0.5 or less.

It is preferred that to the mixture obtained by mixing the aqueous resin emulsion and the aluminum hydroxide having an average primary-particle diameter of 100 nm or smaller, are added an inorganic salt that exhibits a salt-out effect such as sodium chloride, an amine-based oligomer, a polymer flocculating agent such as poly(sodium acrylate) and the like, if necessary. In particular, the polymer flocculating agent is preferably utilized. The use of polymer flocculating agent results in improvement in solid-liquid separability of solid materials made from the resin emulsion and aluminum hydroxide in the mixture. In the step of the mixing may be added an additive such as an extender oil, which may be called a "process oil", an antioxidant, an age resistor, stearic acid, zinc oxide, wax and a coagulating aid, a vulcanizing agent such as sulfur or a vulcanization accelerator.

In the present invention, the mixture obtained by mixing the aqueous resin emulsion and the aluminum hydroxide diameter is then stirred to let the resin and the aluminum hydroxide therein aggregate and to provide a slurry. The aggregation may be performed, for example, by changing pH of the mixture or by dropping the mixture into a saturated solution of an inorganic salt. Specifically, the aggregation may be performed by a method in which a mixture having pH of 10-12

made from the aqueous resin emulsion and the aluminum hydroxide is dropped into an acidic solution, a method in which a mixture having pH 4-9 made from the aqueous resin emulsion and the aluminum hydroxide is dropped into an alkaline solution or  
5 a method in which a mixture of the aqueous resin emulsion and the aluminum hydroxide is dropped into a saturated sodium chloride solution. In the method of dropping the mixture into the acidic solution, the dropping is preferably conducted while an acid such as sulfuric acid, nitrous acid or  
10 hydrochloric acid is also added into the acidic solution so as to adjust the pH of the resulting mixture to the initial pH of the acidic solution. In the method of dropping the mixture into the alkaline solution, the dropping is preferably conducted while a base such as sodium hydroxide or ammonia  
15 is also added into the alkaline solution so as to adjust the pH of the resulting mixture to the initial pH of the alkaline solution.

The slurry obtained after the aggregation is separated into an aqueous solution and a solid resin composite comprising  
20 the resin and the aluminum hydroxide. The separation may be carried out by vacuum filtration, pressure filtration, centrifugal separation or the like. The obtained resin composite may be dried, if necessary. The drying may be conducted by using a continuous material transferring-type  
25 drier such as a through-flow band drier, a tunnel drier and

an apron drier, a material stirring-type drier such as a trench-type stirring drier and a kneading-type drier or the like. Drying temperature may fall within a range of from about 50°C to about 130°C.

5           The resin composite obtained by the separation has excellent tensile strength. The resin composite is also superior in flame resistance to conventional resin composites which contain aluminum hydroxide in the same amount. The resin composite may contain a vulcanizing agent, a  
10 vulcanization accelerator, a vulcanization accelerating aid, a vulcanization decelerator, an age resistor, a softening agent, an adhesive, a filler other than aluminum hydroxide, an extending agent or a colorant when the resin contained therein is styrene-butadiene rubber, butadiene rubber,  
15 chloroprene rubber or isoprene rubber. If necessary, the resin composite which contains such an additive may be kneaded and subjected to a vulcanization treatment such as press vulcanization, can vulcanization, transfer molding vulcanization, injection molding vulcanization or extruding  
20 continuous vulcanization. The resin composite can be utilized for preparing a master batch having an increased amount of the aluminum hydroxide. The master batch may be produced in the same method as that of the resin composite described above except that a ratio of the aluminum hydroxide  
25 to the resin is higher than that of the above-described resin

composite. The master batch is kneaded with a prescribed amount of resin and then molded to provide a molding article.

The resin composite in the present invention can be used, for example, as a raw material of a tire (tread, tube or the like) of automobiles, cushioning material, a belt, a hose, a foam, a film, a carpet-backing material, an electric wire-covering material or the like.

The resin composite in the present invention has excellent tensile strength and is useful as a molding article or a raw material thereof. The method for producing the resin composite in the present invention provides a resin composite having excellent tensile strength.

#### EXAMPLES

The present invention is described in more detail by following Examples, which should not be construed as a limitation upon the scope of the present invention.

##### Example 1

Into a glass container, was fed 286 g of aluminum hydroxide slurry (crystalline structure: boehmite, average primary-particle diameter: 5 nm, solid content: 7% by weight) obtained by hydrolysis of aluminum alkoxide. The slurry was adjusted to have pH of 10.7 and heated to 65°C. To the slurry, was added 410 g of styrene-butadiene rubber latex (styrene



content: 35% by weight, solid content: 24.4% by weight, sign  
of surface potential: negative, pH 10.7, manufactured by  
Sumitomo Chemical Co., Ltd.) which had been heated to 65°C.  
The resulting mixture was stirred at 600 rpm. Into the mixture  
5 under stirring, were added in turn 260 mL of a 25% by weight  
of aqueous NaCl solution, 0.2 g of an age resistor (trade  
name: Antigene 6C, manufactured by Sumitomo Chemical Co.,  
Ltd.) and 37.5 g of an extender oil (trade name: Fukkol Aromax-3,  
manufactured by Fujikosan Co., Ltd.) to obtain a viscous  
10 mixture.

1.85 L of water, 337 mL of a 25% by weight of aqueous  
NaCl solution, 269 mL of 0.1 N sulfuric acid and 0.44 g of  
a coagulating aid (trade name: Sumirez TE-5, manufactured  
by Sumitomo Chemical Co., Ltd.) were mixed with each other  
15 and heated to 65°C. Into the resulting mixture under stirring  
at 600 rpm, was dropped the above-obtained viscous mixture  
using a separating funnel and aggregated to obtain a slurry.  
The dropping was performed while adjusting pH of the mixture  
to 3.6-4.0 by appropriately adding 0.1 N sulfuric acid. After  
20 the completion of the dropping, the obtained slurry was stirred  
for 10 minutes and divided into a cake and a filtrate using  
a vacuum filter. The obtained cake was washed with two parts  
by weight of 80°C water based on the cake. After the washing,  
the cake was ground into about 1-cm cubes and dried at 80°C  
25 for four hours using an oven.

Into Labo Plastomill (which is its trade name, model:  
20-200C, blade: B-75, manufactured by Toyo Seiki Seisakusyo  
Co., Ltd.), was put 47 g of the above-obtained dry cake, and  
then kneaded at a temperature of 105°C with a rotation speed  
5 of 80 rpm. Then into the kneaded mixture, were added 0.3 g  
of a vulcanization accelerator (trade name: Soxinol CZ,  
manufactured by Sumitomo Chemical Co., Ltd.), 0.3 g of another  
vulcanization accelerator (trade name: Soxinol D,  
manufactured by Sumitomo Chemical Co., Ltd.), 0.42 g of sulfur,  
10 0.6 g of zinc oxide, 0.6 g of stearic acid, 0.45 g of an age  
resistor (trade name: Antigene 3C, manufactured by Sumitomo  
Chemical Co., Ltd.), 0.45 g of wax (trade name: SUNNOC-N,  
manufactured by Ouchi-Shinko Chemical Industrial Co., Ltd.),  
and then kneaded for 5 minutes. After the kneading, the  
15 resulting mixture was subjected to vulcanization molding for  
20 minutes using a 170°C hot press to obtain a resin composite.

On a section of the obtained resin composite, was scanned  
a beam with an EPMA (trade name: EPM-810Q, manufactured by  
Shimadzu Corp.) under the conditions of an acceleration  
20 voltage of 20 kV, an absorption current of 0.01  $\mu$ A, a beam  
diameter of 10  $\mu$ m and a scanning distance of 400  $\mu$ m, to measure  
intensities of the characteristic X-ray of aluminum. An  
average intensity X of the measured characteristic X-ray and  
the standard deviation Y of the intensities were calculated  
25 and then the index Y/X was also calculated. The index Y/X

was found to be 0.038. The obtained EPMA chart is shown in Fig. 1. The resin composite was molded and cut into a No. 3 dumbbell-shaped specimen. The tensile strength of the specimen was measured with Autograph AGS-500B (which is its trade name, manufactured by Shimadzu Corp.) in accordance with JIS K-6251, and found to be 6.8 MPa.

#### Comparative Example 1

Into Labo Plastomill (which is its trade name, model: 20-200C, blade: B-75, manufactured by Toyo Seiki Seisakusyo Co., Ltd.), were put 6 g of aluminum hydroxide powder (crystalline structure: boehmite, average primary-particle diameter: 13 nm) obtained by hydrolysis of aluminum alkoxide followed by drying and 41 g of styrene-butadiene rubber (trade name: Sumitomo SBR HS-1, manufactured by Sumitomo Chemical Co., Ltd.), and then kneaded at a temperature of 105°C with a rotation speed of 80 rpm. Then, into the kneaded mixture, were added 0.3g of a vulcanization accelerator (trade name: Soxinol CZ, manufactured by Sumitomo Chemical Co., Ltd.), 0.3 g of another vulcanization accelerator (trade name: Soxinol D, manufactured by Sumitomo Chemical Co., Ltd.), 0.42 g of sulfur, 0.6 g of zinc oxide, 0.6 g of stearic acid, 0.4 g of an age resistor (trade name: Antigene 3C, manufactured by Sumitomo Chemical Co., Ltd.) and 0.45 g of wax (trade name: SUNNOC-N, manufactured by Ouchi-Shinko Chemical Industrial

Co., Ltd.), and then kneaded for 5 minutes. The resulting mixture was subjected to vulcanization molding for 20 minutes using a 170°C hot press to obtain a resin composite.

As for the obtained resin composite, the index Y/X and tensile strength were measured in the same manner as in Example 1. The index Y/X and tensile strength were found to be 0.116 and 4.1 MPa, respectively. The EPMA chart is shown in Fig. 1.

#### 10 Example 2

Into a glass container, was put 1430 g of aluminum hydroxide slurry (crystalline structure: boehmite, average primary-particle diameter: 13 nm, solid content: 7% by weight) obtained by hydrolysis of aluminum alkoxide. The slurry was adjusted to have pH of 11 and heated to 65°C. To the slurry, was added 435 g of styrene-butadiene rubber latex (styrene content: 35% by weight, solid content: 22.9% by weight, sign of surface potential: negative, pH 10.7, manufactured by Sumitomo Chemical Co., Ltd.) which had been heated to 65°C. The resulting mixture was stirred at 600 rpm. Into the mixture under stirring, were added 184 mL of a 25% by weight of aqueous NaCl solution and then a mixed liquid obtained by mixing 2.87 g of an antioxidant (trade name: SL-TNP, manufactured by Kyodo Chemical Co., Ltd.), 0.57 g of oleic acid (reagent grade, manufactured by Wako Pure Chemical Industries, Ltd.), 0.064

g of potassium hydroxide (reagent grade, manufactured by Wako Pure Chemical Industries, Ltd.) and 16.52 g of water. The resulting mixture was mixed to obtain a viscous mixture.

6.46 L of water, 1385 g of a 25% by weight of aqueous NaCl solution, 678 g of 0.1 N sulfuric acid and 1.76 g of a coagulating aid (trade name: HAKUTOL R-107; manufactured by Hakuto Chemical Co., Ltd.) were mixed with each other and heated to 65°C. Into the resulting mixture under stirring at 600 rpm, was dropped the above-obtained viscous mixture using a separating funnel and aggregated to obtain a slurry. After the completion of the dropping, the slurry was stirred for 10 minutes and divided into a cake and a filtrate using a vacuum filter. The obtained cake was washed with two parts by weight of 80°C water based on the cake. After the washing, the cake was ground into about 1-cm cubes and dried in at 80°C for four hours using an oven. The obtained dry cake was subjected to press molding under a molding pressure of 1 MPa at 160°C for five minutes, to obtain a molding article having a length of 150mm, a width of 150 mm and a thickness of 3 mm.

As for the obtained molding article, the index Y/X was measured in the same manner as in Example 1. The index Y/X was found to be 0.117. The EPMA chart is shown in Fig. 1. The molding article was stamped out with a cutting machine (manufactured by Dumbbell Co., Ltd.) into a specimen having

a length of 125 mm, a width of 6.5 mm and a thickness of 3 mm. An oxygen index of this specimen was measured with an oxygen index system combustion tester (model: ON-1, manufactured by Toyo Rika Kogyo Ltd.) in accordance with  
5 JIS-K7201. The oxygen index was found to be 23.

#### Comparative Example 2

Into a Banbury mixer, were put 100 g of aluminum hydroxide powder (crystalline structure: boehmite, average  
10 primary-particle diameter: 13 nm) obtained by hydrolysis of aluminum alkoxide followed by drying and 100 g of styrene-butadiene rubber (trade name: Sumitomo SBR #1500, manufactured by Sumitomo Chemical Co., Ltd.) and then kneaded. The resulting mixture was subjected to press molding under  
15 a molding pressure of 1 MPa at 160°C for 5 minutes to obtain a molding article having a length of 150 mm, a width of 150 mm and a thickness of 3 mm.

As for the obtained molding article, an oxygen index was measured under the same conditions as in Example 2. The  
20 oxygen index was found to be 22.

Compared to the molding article obtained in Comparative Example 2, the molding article obtained in Example 2 has a higher oxygen index, which means the article in Example 2 is superior in flame resistance, as well as has higher tensile  
25 strength.

### Example 3

Into a glass container, was put 1429 g of aluminum hydroxide slurry (crystalline structure: boehmite, average  
5 primary-particle diameter: 5 nm, solid content: 7% by weight)  
obtained by hydrolysis of aluminum alkoxide. The slurry was  
adjusted to have pH of 10.7 and heated to 65°C. To the slurry,  
was added 410 g of styrene-butadiene rubber latex (styrene  
content: 35% by weight, solid content: 24.4% by weight, sign  
10 of surface potential: negative, pH 10.7, manufactured by  
Sumitomo Chemical Co., Ltd.) which had been heated to 65°C.  
The resulting mixture was stirred at 600 rpm. Into the mixture  
under stirring, were added in turn 224 mL of a 25% by weight  
of aqueous NaCl solution, 0.2 g of an age resistor (trade  
15 name: Antigene 6C, manufactured by Sumitomo Chemical Co.,  
Ltd.), 37.5 g of an extender oil (trade name: Fukkol Aromax-3,  
manufactured by Fujikosan Co., Ltd.) to obtain a viscous  
mixture.

169 ml of a 0.1% by weight of aqueous flocculating agent  
20 solution prepared by dissolving a polymer flocculating agent  
(trade name: Sumifloc FN-10H; manufactured by Sumitomo  
Chemical Co., Ltd.) in water, 9.7 L of water, 1.8 L of a 25%  
by weight of aqueous NaCl solution and 1.4 L of 0.1 N sulfuric  
acid were mixed with each other and heated to 65°C. To the  
25 resulting mixture under stirring at 600 rpm, was dropped the

above-obtained viscous mixture using a separation funnel and aggregated to obtain a slurry. The dropping was performed while adjusting pH of the mixture to pH 3.6-4.0 by appropriately adding 0.1 N sulfuric acid. After the completion of the dropping, the slurry was stirred for 10 minutes and then left stand. After that, solid materials in the slurry were precipitated. The supernatant fluid therein was sucked out with an aspirator and the remaining concentrated slurry was divided into a cake and a filtrate using a vacuum filter. The obtained cake was washed with two parts by weight of 80°C water based on the cake. After the washing, the cake was ground into about 1-cm cubes and dried at 80°C for four hours using an oven. Except for using the dry cake obtained here, the same manner as in Example 1 was conducted to produce a resin composite.

#### Example 4

1.17 Gram of a coagulating aid (trade name: Sumirez TE-5, manufactured by Sumitomo Chemical Co., Ltd.), 9.7 L of water, 1.8 L of a 25% by weight of aqueous NaCl solution and 1.4 L of 0.1 N sulfuric acid were mixed with each other and heated to 65°C. To the resulting mixture under stirring at 600 rpm, was dropped using a separation funnel a viscous mixture obtained in the same manner as in Example 3 and aggregated to obtain a slurry. The dropping was performed while



adjusting the resulting mixture to have pH of 3.6-4.0 by appropriately adding 0.1 N sulfuric acid. After the completion of the dropping, the slurry was stirred for 10 minutes and then left stand. After being left stand, no solid material was precipitated in the slurry. The slurry was divided into a cake and a filtrate using a vacuum filter. The resulting cake was washed with two parts by weight of 80°C water based on the cake. After the washing, the cake was ground into about 1-cm cubes and dried at 80°C for four hours using an oven. Except for using the dry cake obtained here, the same manner as in Example 1 was conducted to produce a resin composite.

What is claimed is:

1. A resin composite comprising a resin and aluminum hydroxide having an average primary-particle diameter of about 100 nm or smaller, wherein said composite has an index  
5 Y/X of 0.1 or less provided that the value X is an average value of intensities of aluminum characteristic X-ray measured by scanning a beam on a straight line on the composite with an electron-probe X-ray microanalyzer and the value Y is a standard deviation of the intensities.

10 2. The resin composite according to claim 1 wherein the resin is a synthetic resin selected from vinyl acetate resin, acrylic resin, silicon resin, polybutene resin, copolymer resins of vinyl acetate and ethylene, styrene, acrylic acid or vinyl chloride, polystyrene,  
15 styrene-butadiene rubber, butadiene rubber, chloroprene rubber and isoprene rubber.

3. A method for producing a resin composite comprising the steps of mixing an aqueous resin emulsion containing a resin with aluminum hydroxide having an average  
20 primary-particle diameter of 100 nm or smaller, letting the resin and the aluminum hydroxide therein aggregate to obtain a slurry containing a resin composite and separating the composite from the slurry.

4. The process according to claim 3 wherein the  
25 aqueous resin emulsion is an emulsion which is prepared by

dispersing and emulsifying a synthetic resin selected from vinyl acetate resin, acrylic resin, silicon resin, polybutene resin, copolymer resins of vinyl acetate and ethylene, styrene, acrylic acid or vinyl chloride, polystyrene,  
5 styrene-butadiene rubber, butadiene rubber, chloroprene rubber and isoprene rubber, in water.


# ABSTRACT

A resin composite having excellent tensile strength and a process for producing the composite are provided. The resin composite comprises a resin and aluminum hydroxide  
5 having an average primary-particle diameter of about 100 nm or smaller and has an index  $Y/X$  of 0.1 or less provided that the value  $X$  is an average intensity of intensities of aluminum characteristic X-ray measured by scanning a beam on a straight line on the composite with an electron-probe X-ray  
10 microanalyzer and the value  $Y$  is a standard deviation of the intensities.


Fig. 1

X-ray intensity


Example 1

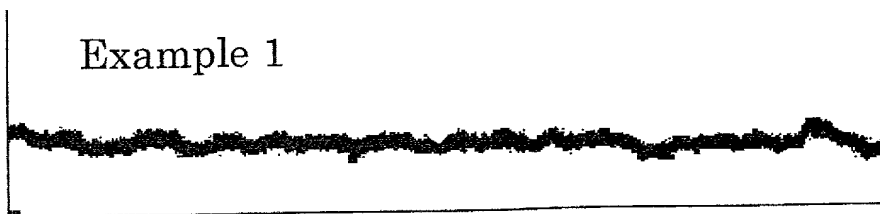

Example 2

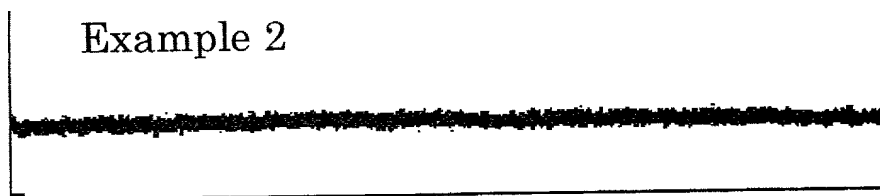

Comparative Example 1

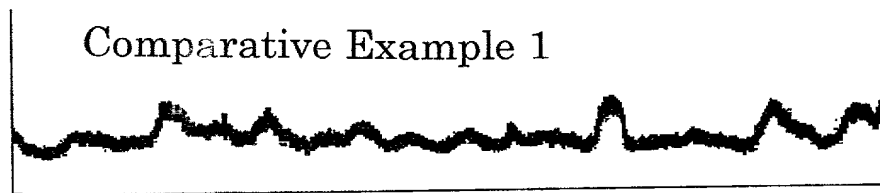

Scanning Distance

20  $\mu\text{m}$

20250416 15:30:20